



**Solar  Screen**

**BLUE 40 C**

Design  
Coloured - Transparent

Description

The Blue 40 C film significantly reduces solar heat while retaining a good amount of natural light. It helps reduce glare and adds a colorful, aesthetic, and personalized touch to the building.



Discover the product  
through video

### Characteristics

 **Warranty**  
10 years

 **Fire Resistance Rating**  
M1

 **Storage in recommended conditions**  
3 years

 **Widths Available**  
152 cm

 **Installation Type**  
Interior

 **Color From the Outside**  
Blue

 **Length**  
30.5 m

### Construction

- 1 Scratch-resistant hard coating providing surface protection, durability, and ease of cleaning
- 2 High optical quality polyester, with an IR-blocking metallic particle coating
- 3 Bonding adhesive
- 4 High optical quality dyed polyester
- 5 PS adhesive, polymerizes with glass within 15 days
- 6 Protection PET release liner, disposable after installation



**Composition**  
PET



**Thickness**  
40 µm

### Optical and solar properties

UV Rejection (%) 99

Visible Light Transmission (%) 66

Glue Pressure sensitive acrylic

### Application advice

Vertical situation and for a standard glazed surface

Clear Single Pane ✓

Tinted Single Pane |

Reflective Tinted Single Pane ✓

Clear Double Pane |

Tinted Double Pane |

Reflective Tinted Double Pane ✓


Gas-Filled Double Pane - Low E |

Stadip Ext. Clear Double Pane |

Stadip Int. Clear Double Pane ✗

✓ Yes ✗ Not recommended | Caution

### Details

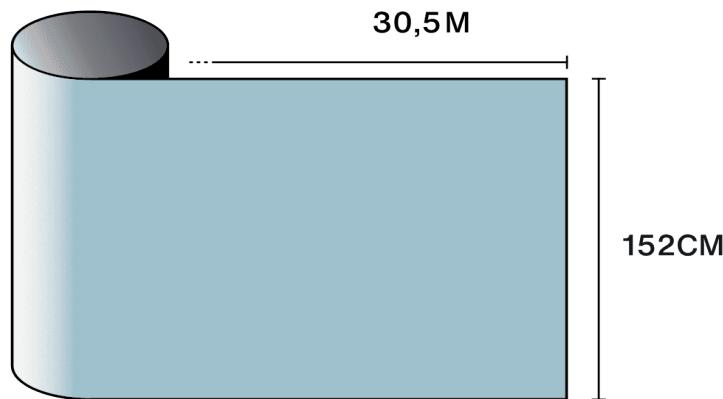

### Installation and Maintenance Advice

Use Slide On (600-F02) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video