



Solar  Screen

BLUE 40 C

Design
Coloured - Transparent

Description

The Blue 40 C film significantly reduces solar heat while retaining a good amount of natural light. It helps reduce glare and adds a colorful, aesthetic, and personalized touch to the building.



Discover the product
through video

Characteristics



Warranty
10 years



Fire Resistance Rating
M1



Storage in recommended conditions
3 years



Widths Available
152 cm



Installation Type
Interior



Color From the Outside
Blue



Length
30.5 m

Construction

- 1 Scratch-resistant hard coating providing surface protection, durability, and ease of cleaning
- 2 High optical quality polyester, with an IR-blocking metallic particle coating
- 3 Bonding adhesive
- 4 High optical quality dyed polyester
- 5 PS adhesive, polymerizes with glass within 15 days
- 6 Protection PET release liner, disposable after installation



Composition
PET



Thickness
40 µm

Optical and solar properties

UV Rejection (%)	99
Visible Light Transmission (%)	66
Glue	Pressure sensitive acrylic


Application advice

Vertical situation and for a standard glazed surface

Clear Single Pane	✓
Tinted Single Pane	!
Reflective Tinted Single Pane	✓
Clear Double Pane	!
Tinted Double Pane	!
Reflective Tinted Double Pane	✓
Gas-Filled Double Pane - Low E	!
Stadip Ext. Clear Double Pane	!
Stadip Int. Clear Double Pane	✗

✓ Yes ✗ Not recommended ! Caution

Details

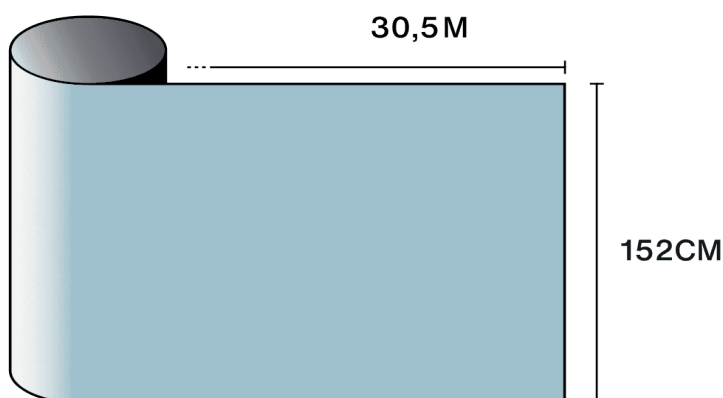

Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video