

Solar Screen

CLARITY 245 XC - OLD

Solar Control
Transparent - Exterior

Description

Visible Light Transmission (%)




Visible Light Reflection - External (%)



UV Rejection (%)



Total Solar Energy Rejected (%)

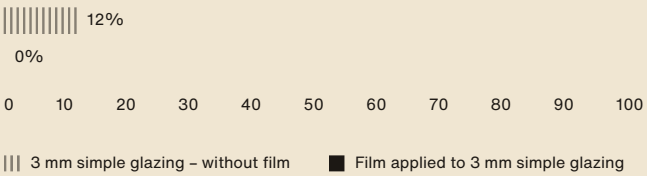

Certified B Corporation

Solar Screen

CLARITY 245 XC - OLD

Solar Control
Transparent - Exterior

Characteristics

Warranty
Up to 10 years

Fire Resistance Rating
M1

Storage in recommended conditions
3 years

Widths Available
122 cm, 152 cm, 183 cm

Installation Type
Exterior

Color From the Outside
Neutral

Length
30.5 m


Construction

1 Scratch-resistant hard coating providing surface protection, durability, and ease of cleaning
2 High optical quality polyester, with an IR-blocking metallic particle coating
3 Bonding adhesive
4 High optical quality polyester
5 PS adhesive, polymerizes with glass within 15 days
6 Protection PET release liner, disposable after installation

Composition
PET

Thickness

Details

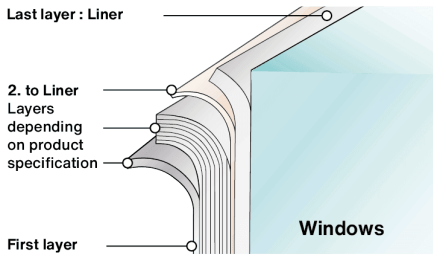

Energy and environmental benefits[01]

Energy savings

Carbon footprint reduction

Financial savings

Access our energy savings calculator

Optical and solar properties

	Single 3mm		Double Low-E	
Pane type	No film	With Film	No film	With Film

Application advice[02]

Vertical situation and for a standard glazed surface

Clear Single Pane	✓
Tinted Single Pane	✓
Reflective Tinted Single Pane	✓
Clear Double Pane	✓
Tinted Double Pane	✓
Reflective Tinted Double Pane	✓
Gas-Filled Double Pane - Low E	✓
Stadip Ext. Clear Double Pane	✓
Stadip Int. Clear Double Pane	✓

✓ Yes × Not recommended ! Caution

Installation and Maintenance Advise

Access the installation and maintenance advice video

01 Values based on a study carried out on an air-conditioned building located in Luxembourg, with a film applied on a low-E double glazing, facing East. The heating months considered are from October to March, and the cooling months from April to September. We consider an electric heating system of the heat pump type, with a production efficiency of 3.5 and an electric cooling system with an efficiency of 3. For more information, visit our online tool.

02 Advice based on glazed surface area up to 2.5 m², please contact us for any confirmation or thermal shock analysis.
The data in this information sheet is not contractual, SOLAR SCREEN reserves the right to modify the composition of its products at any time. Please refer to our warranties and general sales conditions.