



Solar  Screen

**CLEAR PRINT PET
Easystick**

Design
Decorative - Printing

Description

This media support is suitable for any kind of printing machine. Its silicone adhesive improves the application and allows to remove the product.

Characteristics



Warranty
10 years



Fire Resistance Rating
M1



Storage in recommended conditions
3 years



REACH / RoHS
Compliant



Widths Available
152 cm



Installation Type
Interior



Color From the Outside
Transparent



Length
30.5 m



Product Carbon Footprint (LCA)
1.26 kgCO₂e/m²

Optical and solar properties

UV Rejection (%)	90
Visible Light Transmission (%)	90
Glue	Pressure sensitive acrylic

Application advice

Vertical situation and for a standard glazed surface

Clear Single Pane	✓
Tinted Single Pane	✓
Reflective Tinted Single Pane	✓
Clear Double Pane	✓
Tinted Double Pane	✓
Reflective Tinted Double Pane	✓
Gas-Filled Double Pane - Low E	✓
Stadip Ext. Clear Double Pane	✓
Stadip Int. Clear Double Pane	✓

✓ Yes ✗ Not recommended ! Caution

Construction

- 1 Special printing coating
- 2 High optical quality polyester
- 3 Silicone adhesive, allowing fast dry installation, easy on, easy off
- 4 Protection PET release liner, disposable after installation




Composition
PET



Thickness
140 µm

Details

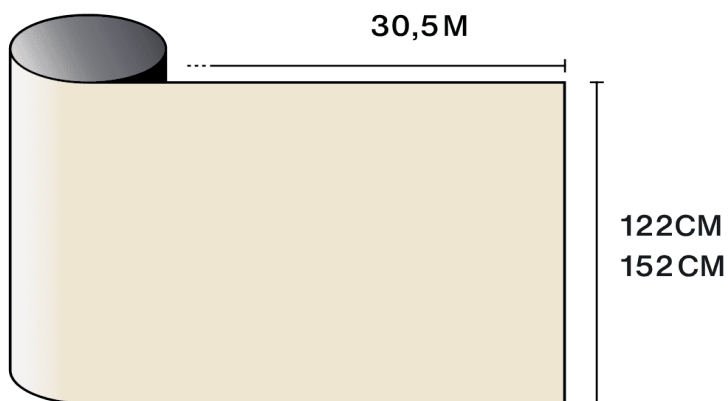

Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video