



Solar  **Screen**

CLEARBOARD

Design
Whiteboards - Clearboard

Description

Clearboard is a transparent dry-erase film that turns any glass surface into a writable whiteboard for standard dry-erase markers. It preserves clarity and transparency when not in use, allowing you to create multifunctional partitions in offices, meeting rooms or classrooms.



Characteristics

	Warranty 10 years
	Fire Resistance Rating M1
	Storage in recommended conditions 3 years
	REACH / RoHS Compliant
	Widths Available 152 cm
	Installation Type Interior
	Color From the Outside Transparent
	Length 30.5 m
	Product Carbon Footprint (LCA) 1.26 kgCO ₂ e/m ²

Construction

- 1 Scratch-resistant hard coating providing surface protection, durability, and ease of cleaning
- 2 High optical quality polyester
- 3 Reinforced PS adhesive to accompany the elasticity of the film in case of impact, polymerizes with glass within 30 days
- 4 Protection PET release liner, disposable after installation




Composition
PET



Thickness
80 µm

Details

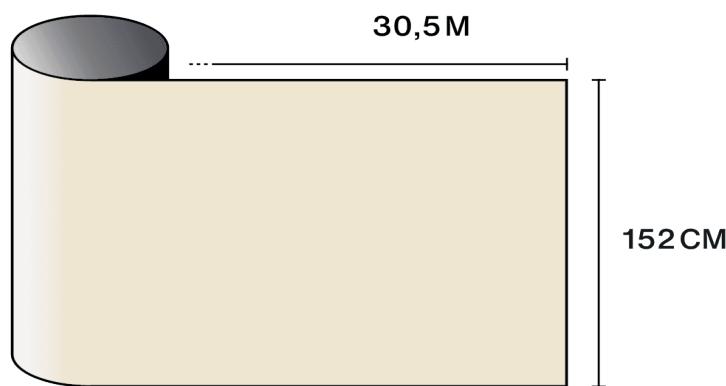

Optical and solar properties

UV Rejection (%)	95
Visible Light Transmission (%)	85

Glue

Pressure sensitive acrylic

Application advice

Vertical situation and for a standard glazed surface

Clear Single Pane	✓
Tinted Single Pane	✓
Reflective Tinted Single Pane	✓
Clear Double Pane	✓
Tinted Double Pane	✓
Reflective Tinted Double Pane	✓
Gas-Filled Double Pane - Low E	✓
Stadip Ext. Clear Double Pane	✓
Stadip Int. Clear Double Pane	✓

✓ Yes ✗ Not recommended ! Caution

Installation and Maintenance Advise

Use Slide On (600-F02) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video