

Solar & Screen

FLORIS

Design
Decorative - Gradation

Description

Floris is a decorative film with a delicate white floral motif that brings softness and elegance to glass partitions and windows. It lets in natural light while subtly obscuring the view, creating privacy and a cosy atmosphere in offices, shops or residential interiors.







Decorative - Gradation

Pressure sensitive acrylic

Characteristics



Warranty 5 years



Fire Resistance Rating



Storage in recommended conditions 3 years



REACH / RoHS





Widths Available

152 cm



Installation Type Interior



Color From the Outside

White



Length 30.5 m



Product Carbon Footprint (LCA)

1.26 kgCO2e/m²

Construction

- 1 High optical quality polyester with printed
- 2 PS adhesive, polymerizes with glass within 15
- 3 Protection PET release liner, disposable after installation



Composition



Thickness

40 µm

Optical and solar properties

| UV Rejection (%) | 90 |
|--------------------------------|---------|
| Visible Light Transmission (%) | min: 25 |
| | max: 80 |

Application advice


Glue

Vertical situation and for a standard glazed surface

| Clear Single Pane | ✓ |
|--------------------------------|----------|
| Tinted Single Pane | ✓ |
| Reflective Tinted Single Pane | ~ |
| Clear Double Pane | ✓ |
| Tinted Double Pane | ✓ |
| Reflective Tinted Double Pane | ✓ |
| Gas-Filled Double Pane - Low E | ✓ |
| Stadip Ext. Clear Double Pane | ✓ |
| Stadip Int. Clear Double Pane | ✓ |
| | |

× Not recommended

Details

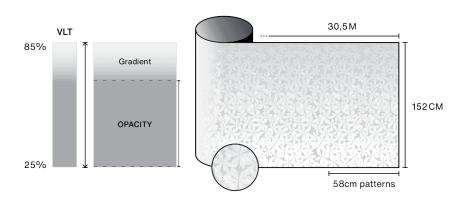

Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video