



Solar  Screen

MAT FROZEN PVC

Design

Privacy - MAT PVC base

Description

The frosted effect we love: pleasing to the eye and smooth to the touch. It delivers a bold, distinctive design while providing excellent privacy protection.

Characteristics



Warranty
5 years



Fire Resistance Rating
M1



Storage in recommended conditions
3 years



REACH / RoHS
Compliant



Widths Available
148 cm



Installation Type
Interior



Color From the Outside
Depoli



Length
30.5 m



Product Carbon Footprint (LCA)
1.26 kgCO₂e/m²

Optical and solar properties

UV Rejection (%)	85
Visible Light Transmission (%)	75
Glue	Pressure sensitive acrylic

Application advice

Vertical situation and for a standard glazed surface

Clear Single Pane	✓
Tinted Single Pane	✓
Reflective Tinted Single Pane	✓
Clear Double Pane	✓
Tinted Double Pane	✓
Reflective Tinted Double Pane	✓
Gas-Filled Double Pane - Low E	✓
Stadip Ext. Clear Double Pane	✓
Stadip Int. Clear Double Pane	✓

✓ Yes ✗ Not recommended ! Caution

Construction

- 100 µm Frosted monomeric PVC
- Half Permanent Adhesive, allowing the degassing of the actual surface, and limits the adhesive transfer during removal
- Disposable PET plastic liner or silicone paper liner for digital cutting




Composition
PET



Thickness
240 µm

Details

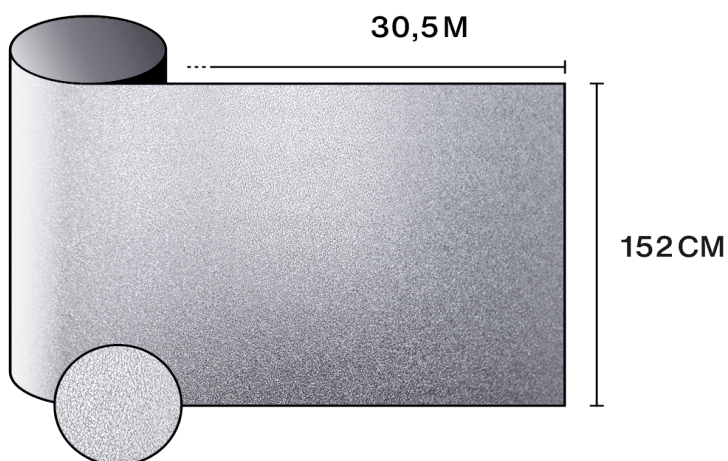

Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video