



Solar  Screen

## MAT FROZEN PVC










Design

Privacy - MAT PVC base

### Description

The frosted effect we love: pleasing to the eye and smooth to the touch. It delivers a bold, distinctive design while providing excellent privacy protection.

## Characteristics

-  **Warranty**  
5 years
-  **Fire Resistance Rating**  
M1
-  **Storage in recommended conditions**  
3 years
-  **REACH / RoHS**  
Compliant
-  **Widths Available**  
148 cm
-  **Installation Type**  
Interior
-  **Color From the Outside**  
Depoli
-  **Length**  
30.5 m
-  **Product Carbon Footprint (LCA)**  
1.26 kgCO<sub>2</sub>e/m<sup>2</sup>

## Optical and solar properties

|                                |                            |
|--------------------------------|----------------------------|
| UV Rejection (%)               | 85                         |
| Visible Light Transmission (%) | 75                         |
| Glue                           | Pressure sensitive acrylic |

## Application advice

Vertical situation and for a standard glazed surface

|                                |   |
|--------------------------------|---|
| Clear Single Pane              | ✓ |
| Tinted Single Pane             | ✓ |
| Reflective Tinted Single Pane  | ✓ |
| Clear Double Pane              | ✓ |
| Tinted Double Pane             | ✓ |
| Reflective Tinted Double Pane  | ✓ |
| Gas-Filled Double Pane - Low E | ✓ |
| Stadip Ext. Clear Double Pane  | ✓ |
| Stadip Int. Clear Double Pane  | ✓ |


✓ Yes    ✗ Not recommended    ! Caution

## Construction

- 1 100 µm Frosted monomeric PVC
- 2 Half Permanent Adhesive, allowing the degassing of the actual surface, and limits the adhesive transfer during removal
- 3 Disposable PET plastic liner or silicone paper liner for digital cutting

-  **Composition**  
PET
-  **Thickness**  
240 µm

## Details

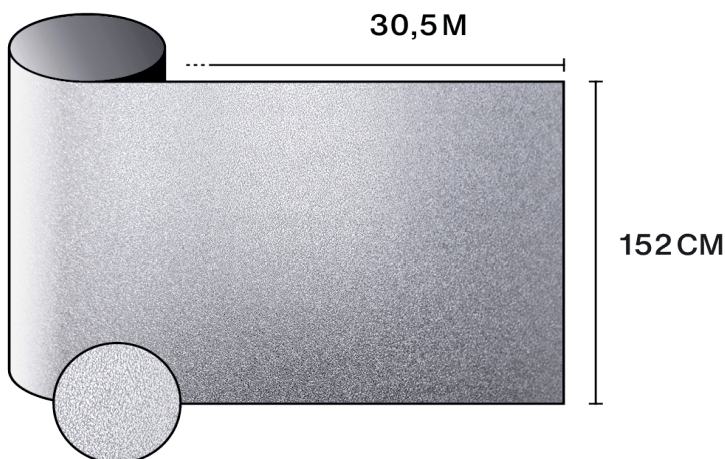

## Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video