



Solar Screen

FUTURA

Design
Decorative - Gradation

Description

With its degraded wave motif, the self-adhesive Futura film will give a touch of the avant-garde to your windows and glass partitions.



Discover the product
through video

Characteristics

 Warranty	5 years
 Fire Resistance Rating	M1
 Storage in recommended conditions	3 years
 REACH / RoHS	Compliant
 Widths Available	152 cm
 Installation Type	Interior
 Color From the Outside	Depoli
 Length	30.5 m
 Product Carbon Footprint (LCA)	1.26 kgCO ₂ e/m ²

Optical and solar properties

UV Rejection (%)	90
Visible Light Transmission (%)	min: 42
Glue	max: 85

Pressure sensitive acrylic

Application advice

Vertical situation and for a standard glazed surface

Clear Single Pane	✓
Tinted Single Pane	✓
Reflective Tinted Single Pane	✓
Clear Double Pane	✓
Tinted Double Pane	✓
Reflective Tinted Double Pane	✓
Gas-Filled Double Pane - Low E	✓
Stadip Ext. Clear Double Pane	✓
Stadip Int. Clear Double Pane	✓


✓ Yes ✗ Not recommended ! Caution

Construction

- 1 High optical quality polyester with printed design
- 2 PS adhesive, polymerizes with glass within 15 days
- 3 Protection PET release liner, disposable after installation

 **Composition** PET  **Thickness** 40 µm

Details

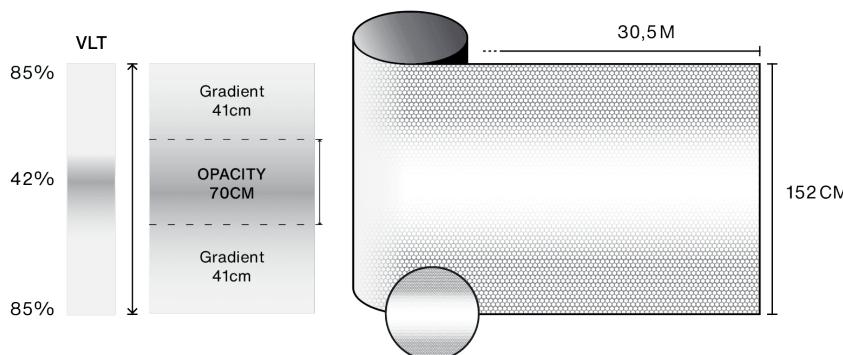

Installation and Maintenance Advice

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video