



Solar Screen

GRADIENT

Design
Decorative - Gradation

Description

Gradient is a decorative film featuring a white gradient from the centre towards the top and bottom of the glass. It balances privacy and light, screening the central field of vision while keeping the space bright and airy, which is perfect for offices, healthcare facilities and public areas.



Characteristics

	Warranty 5 years
	Fire Resistance Rating M1
	Storage in recommended conditions 3 years
	Widths Available 152 cm, 210 cm
	Installation Type Interior
	Color From the Outside White
	Length 30 m
	Product Carbon Footprint (LCA) 1.26 kgCO ₂ e/m ²

Construction

- 1 High optical quality polyester with printed design
- 2 PS adhesive, polymerizes with glass within 15 days
- 3 Protection PET release liner, disposable after installation

 **Composition** PET  **Thickness** 60 µm

Optical and solar properties

UV Rejection (%)	90
Visible Light Transmission (%)	min: 15
Glue	max: 78

Pressure sensitive acrylic


Application advice

Vertical situation and for a standard glazed surface

Clear Single Pane	
Tinted Single Pane	
Reflective Tinted Single Pane	
Clear Double Pane	
Tinted Double Pane	
Reflective Tinted Double Pane	
Gas-Filled Double Pane - Low E	
Stadip Ext. Clear Double Pane	
Stadip Int. Clear Double Pane	

✓ Yes ✗ Not recommended ! Caution

Details

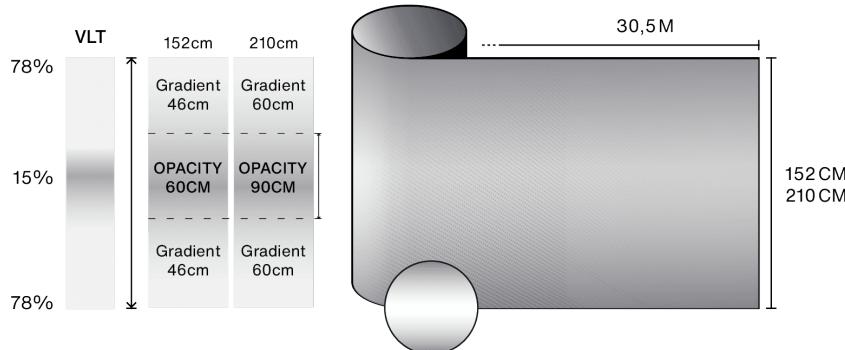

Installation and Maintenance Advice

Use Slide On (600-F02) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video