



Solar  Screen

**GRADIENT**

Design

Decorative - Gradation

Description

Gradient is a decorative film featuring a white gradient from the centre towards the top and bottom of the glass. It balances privacy and light, screening the central field of vision while keeping the space bright and airy, which is perfect for offices, healthcare facilities and public areas.

## Characteristics



**Warranty**  
5 years



**Fire Resistance Rating**  
M1



**Storage in recommended conditions**  
3 years



**Widths Available**  
152 cm, 210 cm



**Installation Type**  
Interior



**Color From the Outside**  
White



**Length**  
30 m



**Product Carbon Footprint (LCA)**  
1.56 kgCO<sub>2</sub>e/m<sup>2</sup>

## Construction

- 1 High optical quality polyester with printed design
- 2 PS adhesive, polymerizes with glass within 15 days
- 3 Protection PET release liner, disposable after installation



**Composition**  
PET



**Thickness**  
60 µm

## Optical and solar properties

UV Rejection (%)	90
Visible Light Transmission (%)	min: 15 max: 78
Glue	Pressure sensitive acrylic


## Application advice

Vertical situation and for a standard glazed surface

Clear Single Pane	✓
Tinted Single Pane	✓
Reflective Tinted Single Pane	✓
Clear Double Pane	✓
Tinted Double Pane	✓
Reflective Tinted Double Pane	✓
Gas-Filled Double Pane - Low E	✓
Stadip Ext. Clear Double Pane	✓
Stadip Int. Clear Double Pane	✓

✓ Yes    × Not recommended    ! Caution

## Details

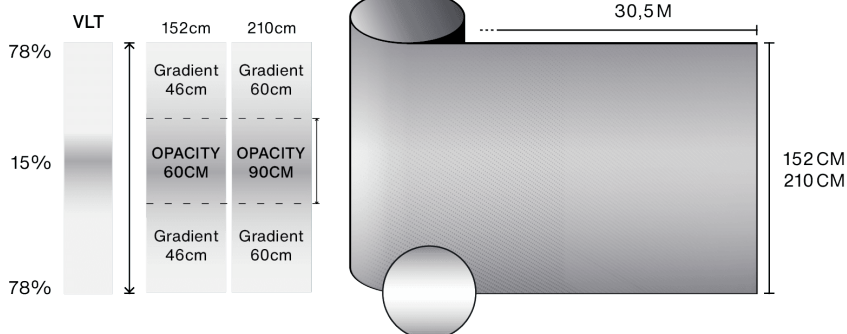

## Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video