



Solar  Screen

## KALEIDOSCOPE

Design

Decorative - Abstract










### Description

Give your windows and partitions a graphic and dynamic dimension with the Kaleidoscope decorative film. The use of geometric shapes in your interior is an excellent way to brighten up any space and make it trendy and cosy.



Discover the product  
through video

## Characteristics

-  **Warranty**  
5 years
-  **Fire Resistance Rating**  
M1
-  **Storage in recommended conditions**  
3 years
-  **REACH / RoHS**  
Compliant
-  **Widths Available**  
152 cm
-  **Installation Type**  
Interior
-  **Color From the Outside**  
White
-  **Length**  
30.5 m
-  **Product Carbon Footprint (LCA)**  
1.26 kgCO<sub>2</sub>e/m<sup>2</sup>

## Optical and solar properties

|                                |                            |
|--------------------------------|----------------------------|
| UV Rejection (%)               | 90                         |
| Visible Light Transmission (%) | 85                         |
| Glue                           | Pressure sensitive acrylic |

## Application advice

Vertical situation and for a standard glazed surface

|                                |   |
|--------------------------------|---|
| Clear Single Pane              | ✓ |
| Tinted Single Pane             | ✓ |
| Reflective Tinted Single Pane  | ✓ |
| Clear Double Pane              | ✓ |
| Tinted Double Pane             | ✓ |
| Reflective Tinted Double Pane  | ✓ |
| Gas-Filled Double Pane - Low E | ✓ |
| Stadip Ext. Clear Double Pane  | ✓ |
| Stadip Int. Clear Double Pane  | ✓ |


✓ Yes    ✗ Not recommended    ! Caution

## Construction

- 1 High optical quality polyester with printed design
- 2 PS adhesive, polymerizes with glass within 15 days
- 3 Protection PET release liner, disposable after installation

-  **Composition**  
PET
-  **Thickness**  
40 µm

## Details

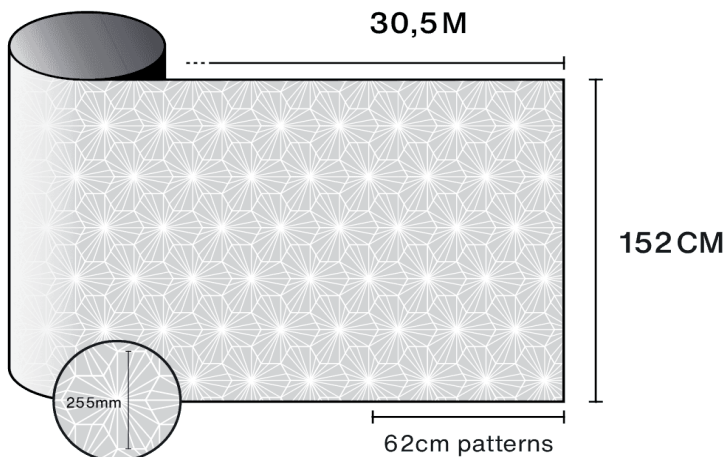

## Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video