



Solar  Screen

MAGNETIC WHITEBOARD

Design

Whiteboards - Whiteboard

Description

This laminated film with a ferrous layer transforms your smooth or glazed surfaces into a whiteboard that can be wiped clean, with the possibility of overlaying any document using magnets. This film is available in various colors.

Characteristics



Warranty
2 ans



Storage in recommended conditions
3 years



Widths Available
120 cm



Installation Type
Interior



Color From the Outside
White



Length
20 m



Product Carbon Footprint (LCA)
1.56 kgCO₂e/m²

Construction

- 1 White PVC compatible with erasable pen
- 2 Bonding adhesive
- 3 500 µm ferrous film
- 4 PS adhesive, polymerizes with glass within 15 days
- 5 Protection PET release liner, disposable after installation



Composition
PET + IRON



Thickness

Optical and solar properties

UV Rejection (%)

Glue

Application advice

Vertical situation and for a standard glazed surface

Clear Single Pane

!

Tinted Single Pane

!

Reflective Tinted Single Pane

!

Clear Double Pane

!

Tinted Double Pane

!

Reflective Tinted Double Pane

!

Gas-Filled Double Pane - Low E

!

Stadip Ext. Clear Double Pane


!

Stadip Int. Clear Double Pane

!

✓ Yes × Not recommended ! Caution

Details

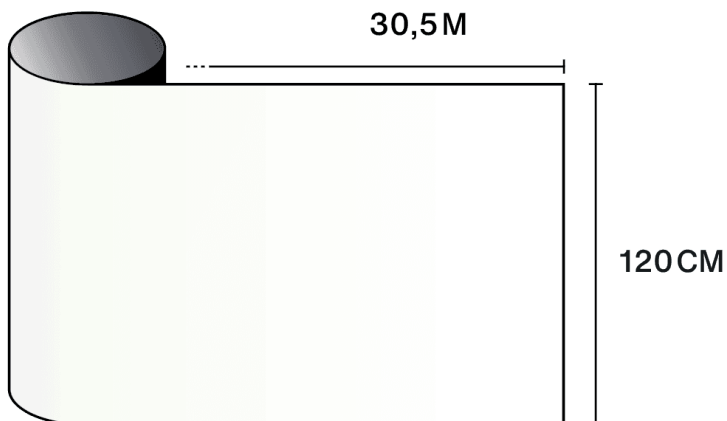

Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video