



Solar  Screen








MAGNETIC WHITEBOARD

Design
Whiteboards - Whiteboard

Description

This laminated film with a ferrous layer transforms your smooth or glazed surfaces into a whiteboard that can be wiped clean, with the possibility of overlaying any document using magnets. This film is available in various colors.

Characteristics

-  **Warranty**
2 ans
-  **Storage in recommended conditions**
3 years
-  **Widths Available**
120 cm
-  **Installation Type**
Interior
-  **Color From the Outside**
White
-  **Length**
20 m
-  **Product Carbon Footprint (LCA)**
1.26 kgCO₂e/m²

Construction

- 1 White PVC compatible with erasable pen
- 2 Bonding adhesive
- 3 500 µm ferrous film
- 4 PS adhesive, polymerizes with glass within 15 days
- 5 Protection PET release liner, disposable after installation

-  **Composition**
PET + IRON
-  **Thickness**

Optical and solar properties

UV Rejection (%)

Glue


Application advice

Vertical situation and for a standard glazed surface

Clear Single Pane	!
Tinted Single Pane	!
Reflective Tinted Single Pane	!
Clear Double Pane	!
Tinted Double Pane	!
Reflective Tinted Double Pane	!
Gas-Filled Double Pane - Low E	!
Stadip Ext. Clear Double Pane	!
Stadip Int. Clear Double Pane	!

✓ Yes ✗ Not recommended ! Caution

Details

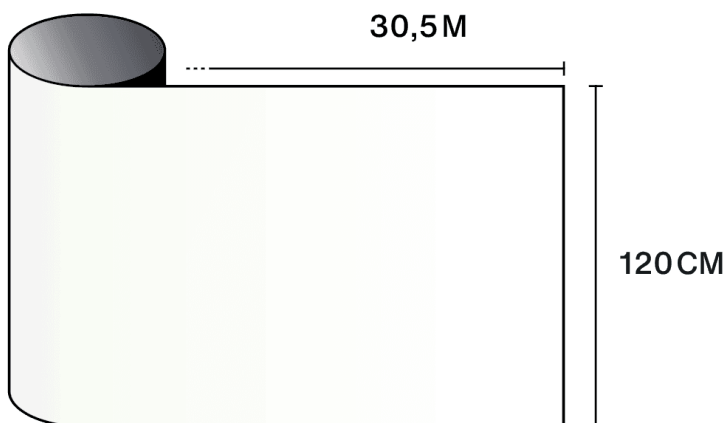

Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video