



Solar  Screen

## MAT FROST PVC

Design

Privacy - MAT PVC base










### Description

Mat Frost PVC privacy films are designed to provide protection against the scrutiny of prying eyes. Whilst completely opalescent, the film still allows most natural light to pass through. With disposable plastic liner or silicone paper liner for digital cutting.



Discover the product  
through video

## Characteristics

-  **Warranty**  
5 years
-  **Fire Resistance Rating**  
M1
-  **Storage in recommended conditions**  
3 years
-  **REACH / RoHS**  
Compliant
-  **Widths Available**  
152 cm
-  **Installation Type**  
Interior
-  **Color From the Outside**  
Depoli
-  **Length**  
50 m
-  **Product Carbon Footprint (LCA)**  
1.56 kgCO<sub>2</sub>e/m<sup>2</sup>

## Optical and solar properties

UV Rejection (%)	95
Visible Light Transmission (%)	70
Glue	Pressure sensitive acrylic

## Application advice

Vertical situation and for a standard glazed surface

Clear Single Pane	✓
Tinted Single Pane	✓
Reflective Tinted Single Pane	✓
Clear Double Pane	✓
Tinted Double Pane	✓
Reflective Tinted Double Pane	✓
Gas-Filled Double Pane - Low E	✓
Stadip Ext. Clear Double Pane	✓
Stadip Int. Clear Double Pane	✓


✓ Yes    ✗ Not recommended    ! Caution

## Construction

- 1 100 µm Frosted monomeric PVC
- 2 Half Permanent Adhesive, allowing the degassing of the actual surface, and limits the adhesive transfer during removal
- 3 Disposable PET plastic liner or silicone paper liner for digital cutting

-  **Composition**  
PVC
-  **Thickness**  
100 µm

## Details

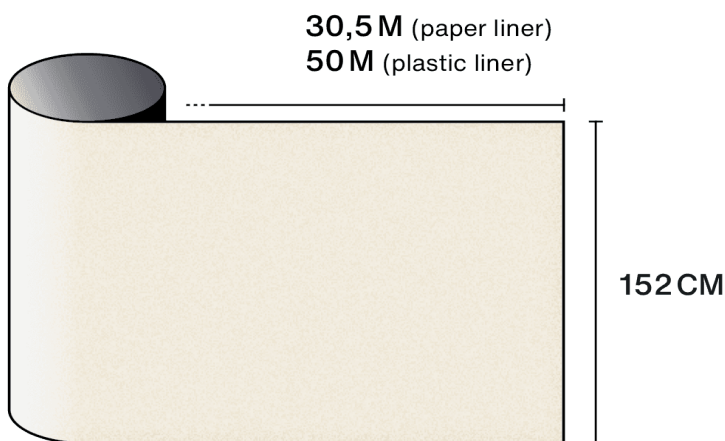

## Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video