



Solar  Screen

MAT FROZEN PVC Paper Liner










Design

Privacy - MAT PVC base

Description

The frosted effect we love: pleasing to the eye and smooth to the touch. It delivers a bold, distinctive design while providing excellent privacy protection.

Characteristics

-  **Warranty**
5 years
-  **Fire Resistance Rating**
M1
-  **Storage in recommended conditions**
3 years
-  **REACH / RoHS**
Compliant
-  **Widths Available**
148 cm
-  **Installation Type**
Interior
-  **Color From the Outside**
Depoli
-  **Length**
30.5 m
-  **Product Carbon Footprint (LCA)**
1.56 kgCO₂e/m²

Optical and solar properties

| | |
|--------------------------------|----------------------------|
| UV Rejection (%) | 85 |
| Visible Light Transmission (%) | 75 |
| Glue | Pressure sensitive acrylic |

Application advice

Vertical situation and for a standard glazed surface

| | |
|--------------------------------|---|
| Clear Single Pane | ✓ |
| Tinted Single Pane | ✓ |
| Reflective Tinted Single Pane | ✓ |
| Clear Double Pane | ✓ |
| Tinted Double Pane | ✓ |
| Reflective Tinted Double Pane | ✓ |
| Gas-Filled Double Pane - Low E | ✓ |
| Stadip Ext. Clear Double Pane | ✓ |
| Stadip Int. Clear Double Pane | ✓ |


✓ Yes ✗ Not recommended ! Caution

Construction

- 1 100 µm Frosted monomeric PVC
- 2 Half Permanent Adhesive, allowing the degassing of the actual surface, and limits the adhesive transfer during removal
- 3 Disposable PET plastic liner or silicone paper liner for digital cutting

-  **Composition**
PVC
-  **Thickness**
180 µm

Details

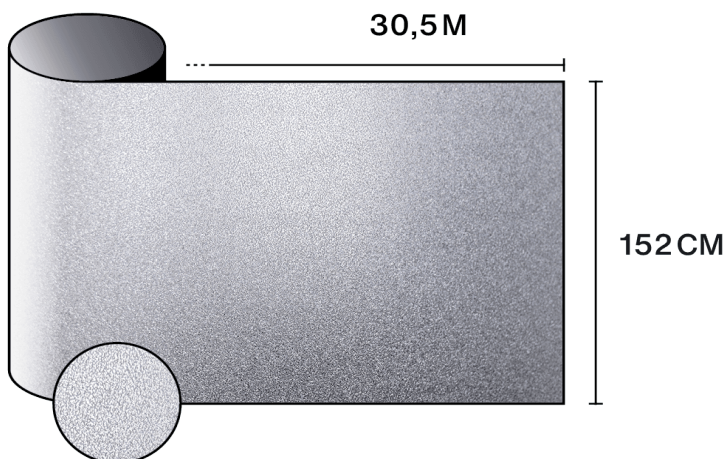

Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video