Solar Screen

MAT FROZEN PVC Paper Liner

Design

Privacy - MAT PVC base

Description

The frosted effect we love: pleasing to the eye and smooth to the touch. It delivers a bold, distinctive design while providing excellent privacy protection.

Certified B Corporation

Solar Screen

MAT FROZEN PVC Paper Liner

Design
Privacy - MAT PVC base

Characteristics

Warranty
5 years

Fire Resistance Rating
M1

Storage in recommended conditions
3 years

REACH / RoHS
Compliant

Widths Available
148 cm

Installation Type
Interior

Color From the Outside
Depoli

Length
30.5 m

Product Carbon Footprint (LCA)
1.56 kgCO2e/m²

Construction

1 100 µm Frosted monomeric PVC
2 Half Permanent Adhesive, allowing the degassing of the actual surface, and limits the adhesive transfer during removal
3 Disposable PET plastic liner or silicone paper liner for digital cutting

Composition
PVC

Thickness
180 µm

Optical and solar properties

UV Rejection (%)	85
Visible Light Transmission (%)	75
Glue	Pressure sensitive acrylic

Application advice

Vertical situation and for a standard glazed surface

Clear Single Pane	✓
Tinted Single Pane	✓
Reflective Tinted Single Pane	✓
Clear Double Pane	✓
Tinted Double Pane	✓
Reflective Tinted Double Pane	✓
Gas-Filled Double Pane - Low E	✓
Stadip Ext. Clear Double Pane	✓
Stadip Int. Clear Double Pane	✓

✓ Yes × Not recommended ! Caution

Details

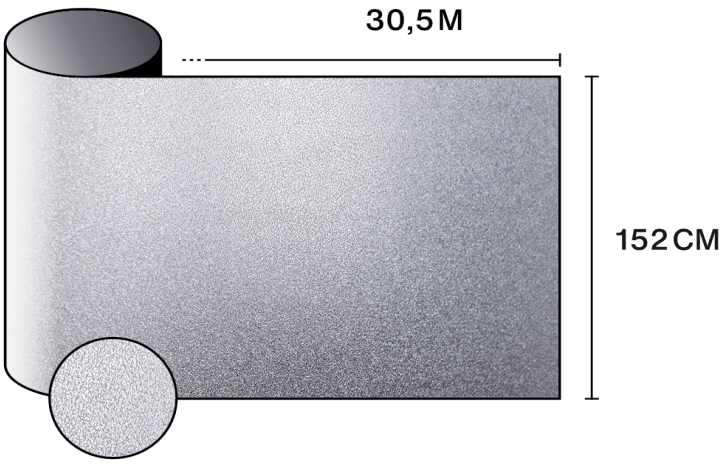

Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.

Access the installation and maintenance advice video