

# Solar & Screen

## **MAT GREEN PET**

Design Coloured - Mat

Description

Applied to clear glass, the Mat Green film bestows a mat green tint to the glass without diminishing its transparent properties. It is the perfect way to enliven any interior glazing (such as partitions, shower screens, etc.) with a touch of colour.







### **MAT GREEN PET**

Coloured - Mat

#### Characteristics



Warranty

5 years



**Fire Resistance Rating** 







Storage in recommended conditions 3 years



**REACH / RoHS** 

Compliant



Widths Available

152 cm



**Installation Type** 

Interior



**Color From the Outside** 

Green



Length





**Product Carbon Footprint (LCA)** 

1.26 kgCO2e/m<sup>2</sup>

#### Construction

- 1 Frosted polyester with satin surface
- 2 Bonding adhesive
- 3 High optical quality dyed polyester
- 4 PS adhesive, polymerizes with glass within 15
- 5 Protection PET release liner, disposable after installation



Composition



**Thickness** 

60 µm

#### Optical and solar properties

UV Rejection (%)	98
Visible Light Transmission (%)	55
Glue	Pressure sensitive acrylic

#### Application advice


Vertical situation and for a standard glazed surface

× Not recommended

Caution

Clear Single Pane	<b>✓</b>
Tinted Single Pane	1
Reflective Tinted Single Pane	<b>✓</b>
Clear Double Pane	!
Tinted Double Pane	1
Reflective Tinted Double Pane	<b>✓</b>
Gas-Filled Double Pane - Low E	1
Stadip Ext. Clear Double Pane	!
Stadip Int. Clear Double Pane	×

#### **Details**

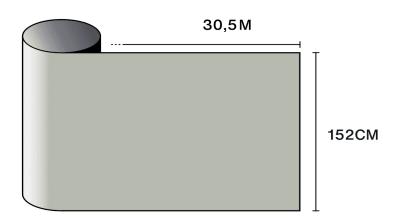

#### Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video