Solar Screen

MAT LIGHT PET

Design

Privacy - MAT PET base

Description

Mat Light privacy films are designed to provide protection against the scrutiny of prying eyes. Whilst completely opalescent, the film still allows most natural light to pass through.

Certified B Corporation

Solar Screen

MAT LIGHT PET

Design
Privacy - MAT PET base

Characteristics

Warranty
10 years

Fire Resistance Rating
M1

Storage in recommended conditions
3 years

REACH / RoHS
Compliant

Widths Available
152 cm

Installation Type
Interior

Color From the Outside
White

Length
30.5 m

Product Carbon Footprint (LCA)
1.56 kgCO2e/m²

Construction

1 Frosted polyester with satin surface
2 Bonding adhesive
3 High optical quality polyester
4 PS adhesive, polymerizes with glass within 15 days
5 Protection PET release liner, disposable after installation

Composition
PET

Thickness
60 µm

Optical and solar properties

UV Rejection (%)	95
Visible Light Transmission (%)	75
Glue	Pressure sensitive acrylic

Application advice

Vertical situation and for a standard glazed surface

Clear Single Pane	✓
Tinted Single Pane	✓
Reflective Tinted Single Pane	✓
Clear Double Pane	✓
Tinted Double Pane	✓
Reflective Tinted Double Pane	✓
Gas-Filled Double Pane - Low E	✓
Stadip Ext. Clear Double Pane	✓
Stadip Int. Clear Double Pane	✓

✓ Yes × Not recommended ! Caution

Details

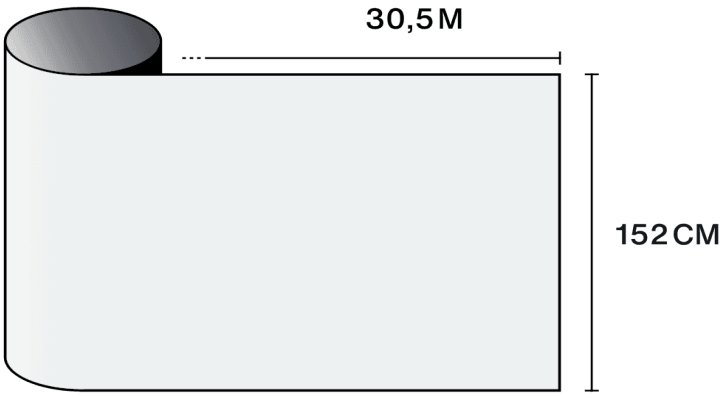

Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.

Access the installation and maintenance advice video