



Solar  Screen

## MAT LIGHT PET

Design

Privacy - MAT PET base

### Description

Mat Light privacy films are designed to provide protection against the scrutiny of prying eyes. Whilst completely opalescent, the film still allows most natural light to pass through.

## Characteristics



**Warranty**  
10 years



**Fire Resistance Rating**  
M1



**Storage in recommended conditions**  
3 years



**REACH / RoHS**  
Compliant



**Widths Available**  
152 cm



**Installation Type**  
Interior



**Color From the Outside**  
White



**Length**  
30.5 m



**Product Carbon Footprint (LCA)**  
1.26 kgCO<sub>2</sub>e/m<sup>2</sup>

## Optical and solar properties

UV Rejection (%) 95

Visible Light Transmission (%) 75

Glue Pressure sensitive acrylic

## Application advice

Vertical situation and for a standard glazed surface

Clear Single Pane ✓

Tinted Single Pane ✓

Reflective Tinted Single Pane ✓

Clear Double Pane ✓

Tinted Double Pane ✓

Reflective Tinted Double Pane ✓

Gas-Filled Double Pane - Low E ✓

Stadip Ext. Clear Double Pane ✓

Stadip Int. Clear Double Pane ✓

✓ Yes    ✗ Not recommended    ! Caution

## Construction

- 1 Frosted polyester with satin surface
- 2 Bonding adhesive
- 3 High optical quality polyester
- 4 PS adhesive, polymerizes with glass within 15 days
- 5 Protection PET release liner, disposable after installation




**Composition**  
PET



**Thickness**  
60 µm

## Details

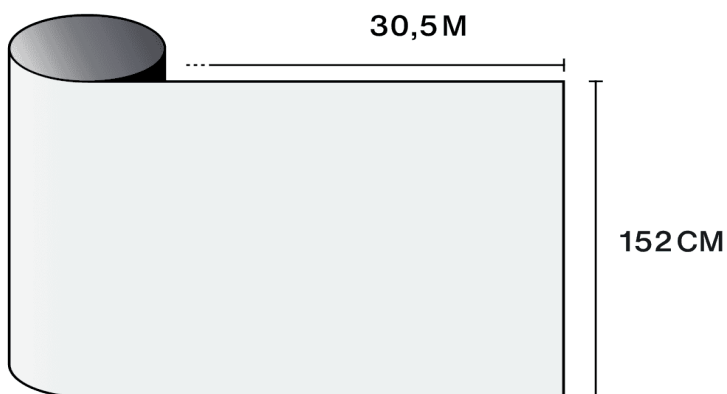

## Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video