



Solar  Screen

## MAT YELLOW PET

Design  
Coloured - Mat










### Description

Applied to clear glass, the transparent Mat Yellow film bestows a mat yellow tint to the glass without diminishing its transparent properties. It is the perfect way to enliven any interior glazing (such as partitions, shower screens, etc.) with a touch of colour.



Discover the product  
through video

### Characteristics

-  **Warranty**  
5 years
-  **Fire Resistance Rating**  
M1
-  **Storage in recommended conditions**  
3 years
-  **REACH / RoHS**  
Compliant
-  **Widths Available**  
152 cm
-  **Installation Type**  
Interior
-  **Color From the Outside**  
Yellow
-  **Length**  
30.5 m
-  **Product Carbon Footprint (LCA)**  
1.26 kgCO<sub>2</sub>e/m<sup>2</sup>

### Construction

- 1 Frosted polyester with satin surface
- 2 Bonding adhesive
- 3 High optical quality dyed polyester
- 4 PS adhesive, polymerizes with glass within 15 days
- 5 Protection PET release liner, disposable after installation

-  **Composition**  
PET
-  **Thickness**  
60 µm

### Optical and solar properties

UV Rejection (%)	99
Visible Light Transmission (%)	60
Glue	Pressure sensitive acrylic


### Application advice

Vertical situation and for a standard glazed surface

Clear Single Pane	✓
Tinted Single Pane	!
Reflective Tinted Single Pane	✓
Clear Double Pane	!
Tinted Double Pane	!
Reflective Tinted Double Pane	✓
Gas-Filled Double Pane - Low E	!
Stadip Ext. Clear Double Pane	!
Stadip Int. Clear Double Pane	✗

✓ Yes ✗ Not recommended ! Caution

### Details

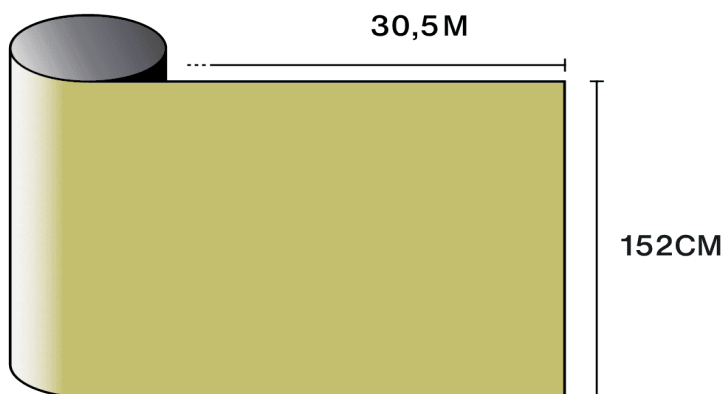

### Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video