

# Solar & Screen

## **MYSTIC**

Design
Decorative - Gradation

Description

Featuring a graduated frosted aspect over 120 cm, the Mystic decorative film allows you to effectively customize your windows and glass partitions.







Decorative - Gradation

Pressure sensitive acrylic

#### Characteristics



Warranty 5 years



**Fire Resistance Rating** 

Storage in recommended conditions 3 years

**REACH / RoHS** Compliant

Widths Available

152 cm

**Installation Type** Interior

**Color From the Outside** 

Depoli

Length

30.5 m



**Product Carbon Footprint (LCA)** 

1.26 kgCO2e/m<sup>2</sup>

#### Construction

- 1 High optical quality polyester with printed
- 2 PS adhesive, polymerizes with glass within 15
- 3 Protection PET release liner, disposable after installation



Composition



**Thickness** 

40 µm

#### Optical and solar properties

| UV Rejection (%)               | 90      |
|--------------------------------|---------|
| Visible Light Transmission (%) | min: 42 |
|                                | max: 85 |

#### Application advice


Glue

rtical situation and for a standard glazed surface

| Clear Single Pane              | <b>~</b> |
|--------------------------------|----------|
| Tinted Single Pane             | <b>✓</b> |
| Reflective Tinted Single Pane  | <b>~</b> |
| Clear Double Pane              | <b>✓</b> |
| Tinted Double Pane             | <b>~</b> |
| Reflective Tinted Double Pane  | <b>✓</b> |
| Gas-Filled Double Pane - Low E | <b>~</b> |
| Stadip Ext. Clear Double Pane  | <b>✓</b> |
| Stadip Int. Clear Double Pane  | <b>~</b> |
|                                |          |

× Not recommended

#### Details

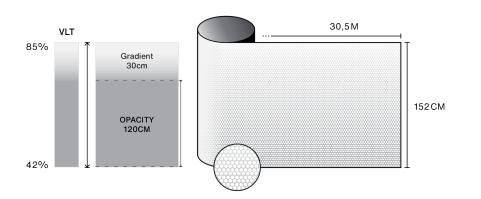

### Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video