Solar Screen

PERLA

Design

Decorative - Gradation

Description

The self-adhesive Perla film is decorated with an ebbing granular motif that will allow you to tastefully customise windows and glass partitions.

Certified B Corporation

Discover the product through video

Solar Screen

PERLA

Design
Decorative - Gradation

Characteristics

Warranty
5 years

Fire Resistance Rating
M1

Storage in recommended conditions
3 years

REACH / RoHS
Compliant

Widths Available
152 cm

Installation Type
Interior

Color From the Outside
Depoli

Length
30.5 m

Product Carbon Footprint (LCA)
1.56 kgCO2e/m²

Construction

1 High optical quality polyester with printed design
2 PS adhesive, polymerizes with glass within 15 days
3 Protection PET release liner, disposable after installation

Composition
PET

Thickness
40 µm

Optical and solar properties

UV Rejection (%)	90
Visible Light Transmission (%)	min: 38
	max: 88
Glue	Pressure sensitive acrylic

Application advice

Vertical situation and for a standard glazed surface

Clear Single Pane	✓
Tinted Single Pane	✓
Reflective Tinted Single Pane	✓
Clear Double Pane	✓
Tinted Double Pane	✓
Reflective Tinted Double Pane	✓
Gas-Filled Double Pane - Low E	✓
Stadip Ext. Clear Double Pane	✓
Stadip Int. Clear Double Pane	✓

✓ Yes × Not recommended ! Caution

Details

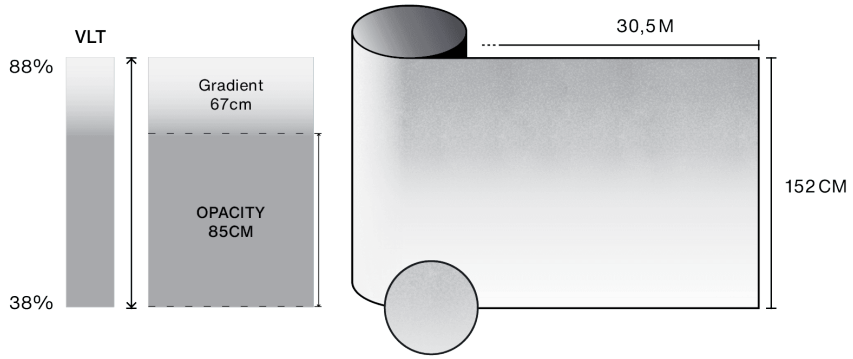

Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.

Access the installation and maintenance advice video