



**Solar Screen**

## RIPPLE

Design  
Decorative - Abstract

### Description

Ripple decorative film personalises your windows and partitions. It is decorated with an organic pattern to give a fresh feeling and bring life to any setting. The use of a discretion film is ideal for embellishing your space while preserving your privacy.



Discover the product  
through video

### Characteristics

|   |  |
|---|--|
|   | <b>Warranty</b><br>5 years   |
|   | <b>Fire Resistance Rating</b><br>M1  |
|   | <b>Storage in recommended conditions</b><br>3 years                              |
|   | <b>REACH / RoHS</b><br>Compliant   |
|   | <b>Widths Available</b><br>152 cm  |
|   | <b>Installation Type</b><br>Interior   |
|   | <b>Color From the Outside</b><br>White   |
|   | <b>Length</b><br>30.5 m  |
|  | <b>Product Carbon Footprint (LCA)</b><br>1.26 kgCO <sub>2</sub> e/m <sup>2</sup> |

### Optical and solar properties

|                                |                            |
|--------------------------------|----------------------------|
| UV Rejection (%)               | 90                         |
| Visible Light Transmission (%) | 70                         |
| Glue                           | Pressure sensitive acrylic |

### Application advice

Vertical situation and for a standard glazed surface

|                                |   |
|--------------------------------|---|
| Clear Single Pane              | ✓ |
| Tinted Single Pane             | ✓ |
| Reflective Tinted Single Pane  | ✓ |
| Clear Double Pane              | ✓ |
| Tinted Double Pane             | ✓ |
| Reflective Tinted Double Pane  | ✓ |
| Gas-Filled Double Pane - Low E | ✓ |
| Stadip Ext. Clear Double Pane  | ✓ |
| Stadip Int. Clear Double Pane  | ✓ |

✓ Yes    ✗ Not recommended    ⚠ Caution

### Construction

- 1 High optical quality polyester with printed design
- 2 PS adhesive, polymerizes with glass within 15 days
- 3 Protection PET release liner, disposable after installation




**Composition**  
PET



**Thickness**  
40 µm

### Details

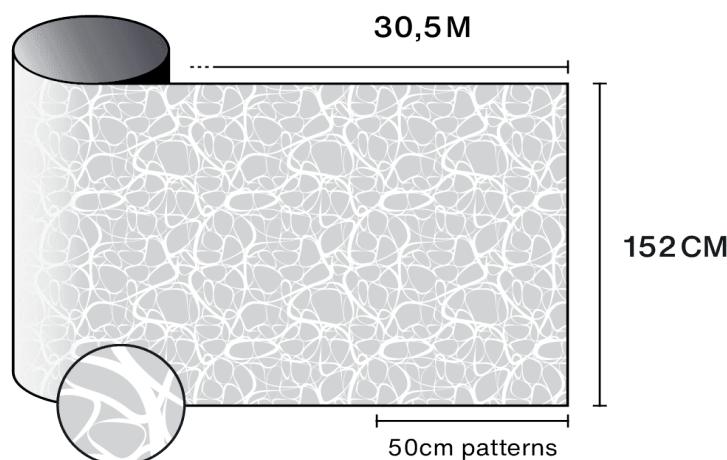

### Installation and Maintenance Advice

Use Slide On (600-F02) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video