



Solar  Screen

STRUCTUR

Design
Decorative - Lines










Description

The Structur decorative film allows you to effectively customize your windows and glass partitions. It is decorated with frosted bands of alternating width (35 mm and 5 mm), separated from each other by 5 mm clear aspect bands.



Discover the product
through video

Characteristics

-  **Warranty**
5 years
-  **Fire Resistance Rating**
M1
-  **Storage in recommended conditions**
3 years
-  **REACH / RoHS**
Compliant
-  **Widths Available**
152 cm
-  **Installation Type**
Interior
-  **Color From the Outside**
Depoli
-  **Length**
30.5 m
-  **Product Carbon Footprint (LCA)**
1.56 kgCO₂e/m²

Optical and solar properties

| | |
|--------------------------------|----------------------------|
| UV Rejection (%) | 90 |
| Visible Light Transmission (%) | 54 |
| Glue | Pressure sensitive acrylic |

Application advice

Vertical situation and for a standard glazed surface

| | |
|--------------------------------|---|
| Clear Single Pane | ✓ |
| Tinted Single Pane | ✓ |
| Reflective Tinted Single Pane | ✓ |
| Clear Double Pane | ✓ |
| Tinted Double Pane | ✓ |
| Reflective Tinted Double Pane | ✓ |
| Gas-Filled Double Pane - Low E | ✓ |
| Stadip Ext. Clear Double Pane | ✓ |
| Stadip Int. Clear Double Pane | ✓ |


✓ Yes ✗ Not recommended ! Caution

Construction

- 1 High optical quality polyester with printed design
- 2 PS adhesive, polymerizes with glass within 15 days
- 3 Protection PET release liner, disposable after installation

-  **Composition**
PET
-  **Thickness**
40 µm

Details

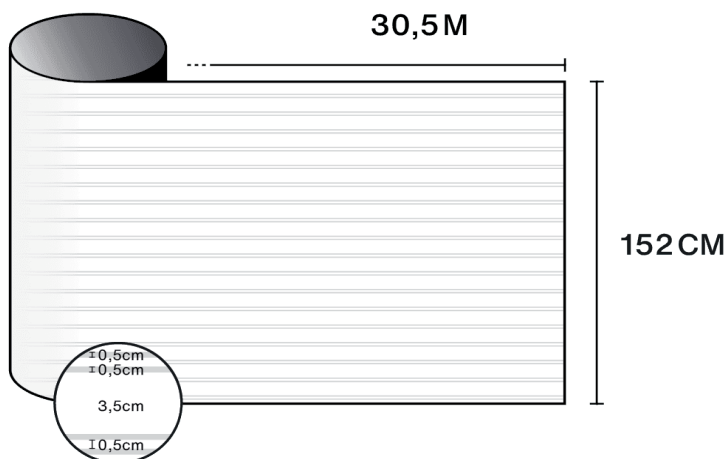

Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video