



Solar  Screen

**SWING**

Design  
Decorative - Abstract










Description

The Swing decorative film allows you to effectively customize your windows and glass partitions. It is decorated with vertically aligned string-like frosted bands.



Discover the product  
through video

## Characteristics

-  **Warranty**  
5 years
-  **Fire Resistance Rating**  
M1
-  **Storage in recommended conditions**  
3 years
-  **REACH / RoHS**  
Compliant
-  **Widths Available**  
152 cm
-  **Installation Type**  
Interior
-  **Color From the Outside**  
Depoli
-  **Length**  
30.5 m
-  **Product Carbon Footprint (LCA)**  
1.56 kgCO<sub>2</sub>e/m<sup>2</sup>

## Optical and solar properties

UV Rejection (%)	90
Visible Light Transmission (%)	80
Glue	Pressure sensitive acrylic

## Application advice

Vertical situation and for a standard glazed surface

Clear Single Pane	✓
Tinted Single Pane	✓
Reflective Tinted Single Pane	✓
Clear Double Pane	✓
Tinted Double Pane	✓
Reflective Tinted Double Pane	✓
Gas-Filled Double Pane - Low E	✓
Stadip Ext. Clear Double Pane	✓
Stadip Int. Clear Double Pane	✓


✓ Yes    ✗ Not recommended    ! Caution

## Construction

- 1 High optical quality polyester with printed design
- 2 PS adhesive, polymerizes with glass within 15 days
- 3 Protection PET release liner, disposable after installation

-  **Composition**  
PET
-  **Thickness**  
40 µm

## Details

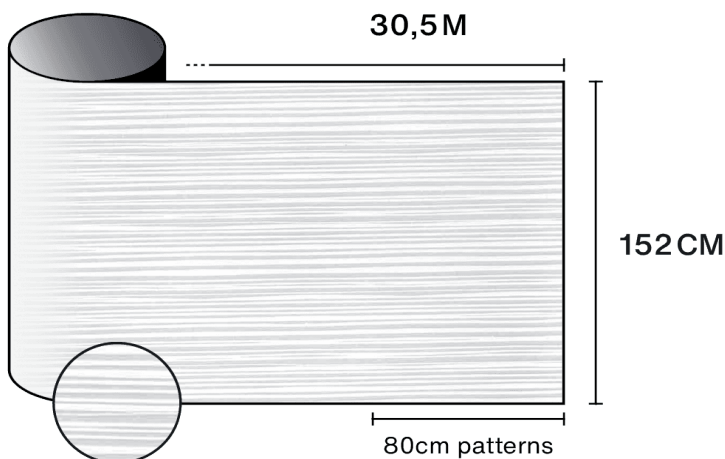

## Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video