



Solar  Screen

## TURQUOISE C

Design  
Coloured - Transparent










### Description

Applied to clear glass, the transparent Turquoise C film bestows a blue/green tint to the glass without diminishing its transparent properties. It is the perfect way to enliven any interior glazing (such as partitions, shower screens, etc.) with a touch of colour.



Discover the product  
through video

## Characteristics

-  **Warranty**  
5 years
-  **Fire Resistance Rating**  
M1
-  **Storage in recommended conditions**  
3 years
-  **REACH / RoHS**  
Compliant
-  **Widths Available**  
152 cm
-  **Installation Type**  
Interior
-  **Color From the Outside**  
Turquoise
-  **Length**  
30.5 m
-  **Product Carbon Footprint (LCA)**  
1.56 kgCO<sub>2</sub>e/m<sup>2</sup>

## Optical and solar properties

|                                |                            |
|--------------------------------|----------------------------|
| UV Rejection (%)               | 99                         |
| Visible Light Transmission (%) | 44                         |
| Glue                           | Pressure sensitive acrylic |

## Application advice

Vertical situation and for a standard glazed surface

|                                |   |
|--------------------------------|---|
| Clear Single Pane              | ✓ |
| Tinted Single Pane             | ! |
| Reflective Tinted Single Pane  | ✓ |
| Clear Double Pane              | ✓ |
| Tinted Double Pane             | ! |
| Reflective Tinted Double Pane  | ✓ |
| Gas-Filled Double Pane - Low E | ✓ |
| Stadip Ext. Clear Double Pane  | ✓ |
| Stadip Int. Clear Double Pane  | ! |


✓ Yes    × Not recommended    ! Caution

## Construction

- 1 Scratch-resistant hard coating providing surface protection, durability, and ease of cleaning
- 2 High optical quality dyed polyester
- 3 PS adhesive, polymerizes with glass within 15 days
- 4 Protection PET release liner, disposable after installation

-  **Composition**  
PET
-  **Thickness**  
40 µm

## Details

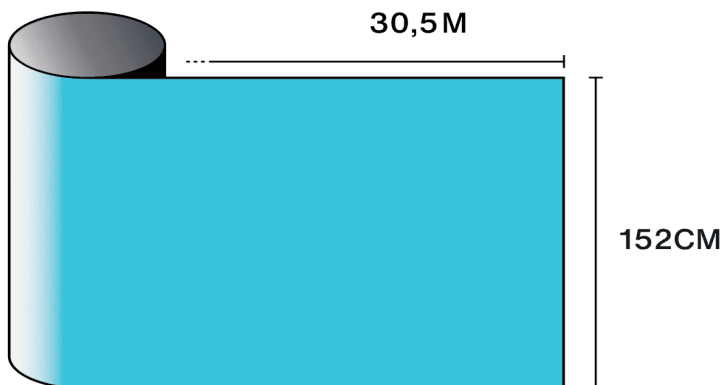

## Installation and Maintenance Advise

Use Slide On (600-F02) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video