



Solar  Screen

WHITE OPAQUE

Design
Privacy - Blackout










Description

The White Opaque black out film provides comprehensive two-way privacy. Blocking almost all light penetration, this film provides an immediate and effective privacy solution, ideally suited for concealing stock, a storage area, etc.



Discover the product
through video

Characteristics

-  **Warranty**
10 years
-  **Fire Resistance Rating**
M1
-  **Storage in recommended conditions**
3 years
-  **REACH / RoHS**
Compliant
-  **Widths Available**
152 cm
-  **Installation Type**
Interior
-  **Color From the Outside**
White
-  **Length**
30.5 m
-  **Product Carbon Footprint (LCA)**
1.30 kgCO₂e/m²

Construction

- 1 Scratch-resistant hard coating providing surface protection, durability, and ease of cleaning
- 2 High optical quality dyed polyester with an IR-blocking metallic particle coating
- 3 Bonding adhesive
- 4 High optical quality polyester
- 5 PS adhesive, polymerizes with glass within 15 days
- 6 Protection PET release liner, disposable after installation

-  **Composition**
PET
-  **Thickness**
150 µm

Optical and solar properties

UV Rejection (%)	99
Visible Light Transmission (%)	1
Glue	Pressure sensitive acrylic


Application advice

Vertical situation and for a standard glazed surface

Clear Single Pane	✓
Tinted Single Pane	!
Reflective Tinted Single Pane	✓
Clear Double Pane	!
Tinted Double Pane	✗
Reflective Tinted Double Pane	✓
Gas-Filled Double Pane - Low E	✗
Stadip Ext. Clear Double Pane	✗
Stadip Int. Clear Double Pane	✗

✓ Yes ✗ Not recommended ! Caution

Details

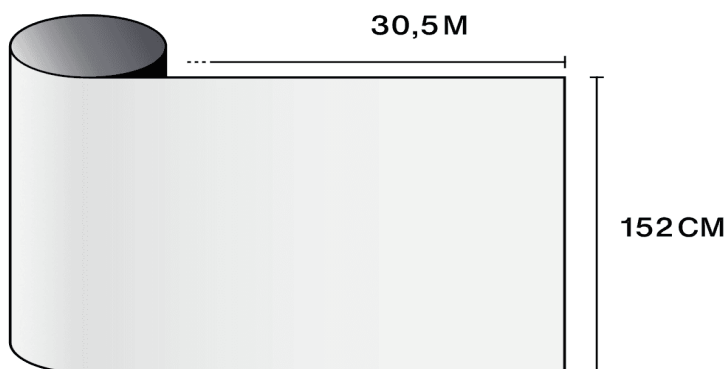

Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video