



Solar  Screen

## WHITE OPAQUE

Design  
Privacy - Blackout










### Description

The White Opaque black out film provides comprehensive two-way privacy. Blocking almost all light penetration, this film provides an immediate and effective privacy solution, ideally suited for concealing stock, a storage area, etc.



Discover the product  
through video

## Characteristics

-  **Warranty**  
10 years
-  **Fire Resistance Rating**  
M1
-  **Storage in recommended conditions**  
3 years
-  **REACH / RoHS**  
Compliant
-  **Widths Available**  
152 cm
-  **Installation Type**  
Interior
-  **Color From the Outside**  
White
-  **Length**  
30.5 m
-  **Product Carbon Footprint (LCA)**  
1.60 kgCO<sub>2</sub>e/m<sup>2</sup>

## Optical and solar properties

|                                |                            |
|--------------------------------|----------------------------|
| UV Rejection (%)               | 99                         |
| Visible Light Transmission (%) | 1                          |
| Glue                           | Pressure sensitive acrylic |

## Application advice

Vertical situation and for a standard glazed surface

|                                |   |
|--------------------------------|---|
| Clear Single Pane              | ✓ |
| Tinted Single Pane             | ! |
| Reflective Tinted Single Pane  | ✓ |
| Clear Double Pane              | ! |
| Tinted Double Pane             | ✗ |
| Reflective Tinted Double Pane  | ✓ |
| Gas-Filled Double Pane - Low E | ✗ |
| Stadip Ext. Clear Double Pane  | ✗ |
| Stadip Int. Clear Double Pane  | ✗ |


✓ Yes ✗ Not recommended ! Caution

## Construction

- 1 Scratch-resistant hard coating providing surface protection, durability, and ease of cleaning
- 2 High optical quality dyed polyester with an IR-blocking metallic particle coating
- 3 Bonding adhesive
- 4 High optical quality polyester
- 5 PS adhesive, polymerizes with glass within 15 days
- 6 Protection PET release liner, disposable after installation

-  **Composition**  
PET
-  **Thickness**  
150 µm

## Details

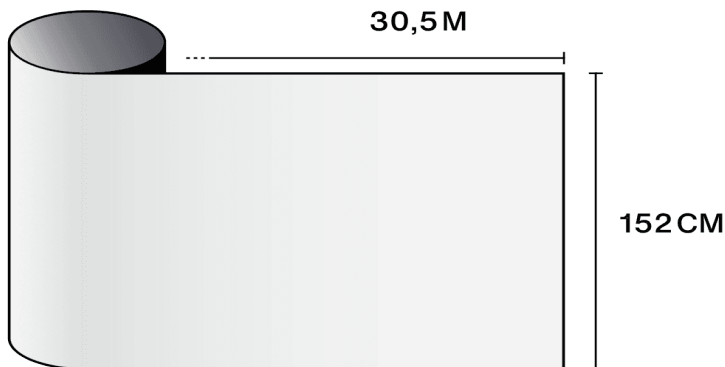

## Installation and Maintenance Advise

Use Slide On (600-F02) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video