



Solar  Screen









ZENITH

Design
Decorative - Gradation

Description

Zenith is a decorative film with a white gradient from bottom to top, creating an elegant transition from privacy to transparency. It softens the view while maintaining brightness, making it ideal for meeting rooms, reception areas and stairwells.

Characteristics

-  **Warranty**
5 years
-  **Fire Resistance Rating**
M1
-  **Storage in recommended conditions**
3 years
-  **Widths Available**
152 cm, 210 cm
-  **Installation Type**
Interior
-  **Color From the Outside**
White
-  **Length**
30 m
-  **Product Carbon Footprint (LCA)**
1.56 kgCO₂e/m²

Construction

- 1 High optical quality polyester with printed design
- 2 PS adhesive, polymerizes with glass within 15 days
- 3 Protection PET release liner, disposable after installation

-  **Composition**
PET
-  **Thickness**
60 µm

Optical and solar properties

UV Rejection (%)	90
Visible Light Transmission (%)	min: 15 max: 88
Glue	Pressure sensitive acrylic


Application advice

Vertical situation and for a standard glazed surface

Clear Single Pane	✓
Tinted Single Pane	✓
Reflective Tinted Single Pane	✓
Clear Double Pane	✓
Tinted Double Pane	✓
Reflective Tinted Double Pane	✓
Gas-Filled Double Pane - Low E	✓
Stadip Ext. Clear Double Pane	✓
Stadip Int. Clear Double Pane	✓

✓ Yes ✗ Not recommended ! Caution

Details

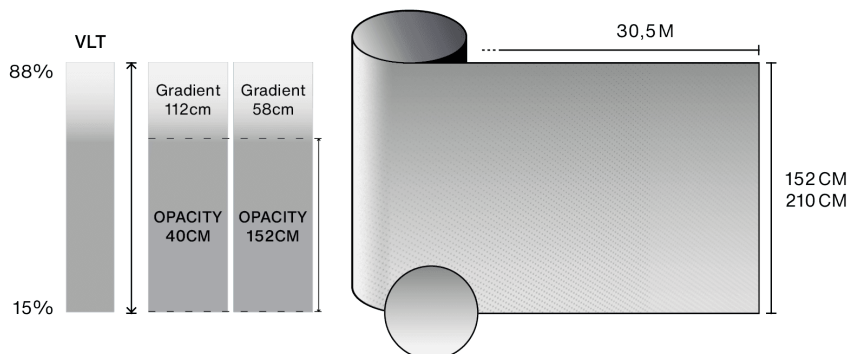

Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video