



Solar  Screen

RIPPLE

Design

Decorative - Abstract

Description

Ripple decorative film personalises your windows and partitions. It is decorated with an organic pattern to give a fresh feeling and bring life to any setting. The use of a discretion film is ideal for embellishing your space while preserving your privacy.



Discover the product
through video

Characteristics



Warranty
5 years



Fire Resistance Rating
M1



Storage in recommended conditions
3 years



REACH / RoHS
Compliant



Widths Available
152 cm



Installation Type
Interior



Color From the Outside
White



Length
30.5 m



Product Carbon Footprint (LCA)
1.56 kgCO₂e/m²

Optical and solar properties

UV Rejection (%) 90

Visible Light Transmission (%) 70

Glue Pressure sensitive acrylic

Application advice

Vertical situation and for a standard glazed surface

Clear Single Pane ✓

Tinted Single Pane ✓

Reflective Tinted Single Pane ✓

Clear Double Pane ✓

Tinted Double Pane ✓

Reflective Tinted Double Pane ✓

Gas-Filled Double Pane - Low E ✓

Stadip Ext. Clear Double Pane ✓

Stadip Int. Clear Double Pane ✓

✓ Yes × Not recommended ! Caution

Construction

- 1 High optical quality polyester with printed design
- 2 PS adhesive, polymerizes with glass within 15 days
- 3 Protection PET release liner, disposable after installation




Composition
PET



Thickness
40 µm

Details

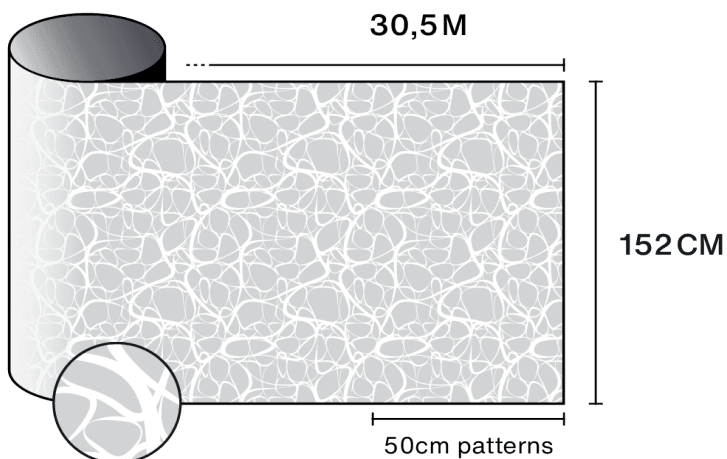

Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video