



**Solar Screen**

## YELLOW C

Design  
Coloured - Transparent

### Description

Applied to clear glass, the transparent Yellow C film bestows a yellow hue to the glass without diminishing its transparent properties. It is the perfect way to enliven any interior glazing (such as partitions, shower screens, etc.) with a touch of colour.



Discover the product  
through video

### Characteristics

	<b>Warranty</b>	5 years
	<b>Fire Resistance Rating</b>	M1
	<b>Storage in recommended conditions</b>	3 years
	<b>REACH / RoHS</b>	Compliant
	<b>Widths Available</b>	152 cm
	<b>Installation Type</b>	Interior
	<b>Color From the Outside</b>	Yellow
	<b>Length</b>	30.5 m
	<b>Product Carbon Footprint (LCA)</b>	1.26 kgCO <sub>2</sub> e/m <sup>2</sup>

### Optical and solar properties

UV Rejection (%)	99
Visible Light Transmission (%)	42
Glue	Pressure sensitive acrylic

### Application advice

Vertical situation and for a standard glazed surface

Clear Single Pane	✓
Tinted Single Pane	✓
Reflective Tinted Single Pane	✓
Clear Double Pane	✓
Tinted Double Pane	✓
Reflective Tinted Double Pane	✓
Gas-Filled Double Pane - Low E	✓
Stadip Ext. Clear Double Pane	✓
Stadip Int. Clear Double Pane	✗

✓ Yes    ✗ Not recommended    ! Caution

### Construction

- 1 Scratch-resistant hard coating providing surface protection, durability, and ease of cleaning
- 2 High optical quality dyed polyester
- 3 PS adhesive, polymerizes with glass within 15 days
- 4 Protection PET release liner, disposable after installation




**Composition**  
PET



**Thickness**  
40 µm

### Details

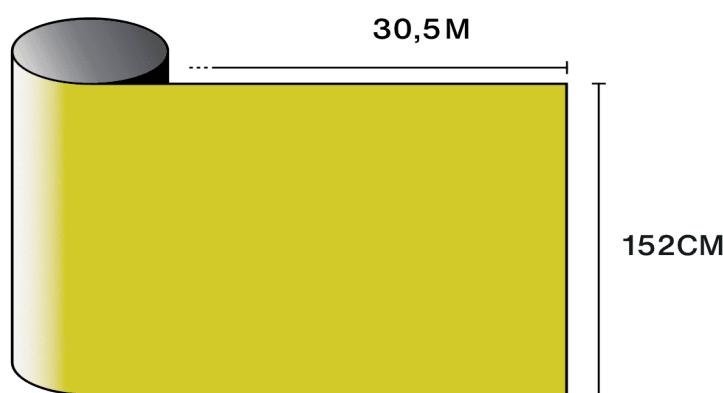

### Installation and Maintenance Advice

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video