



Solar  Screen

CIRCUIT

Design

Decorative - Abstract










Description

The Circuit decorative film is composed of a systematic repeating pattern that customises your windows and glass surfaces. The use of geometric shapes on your glazing or glass partitions is an excellent way to brighten up any space.



Discover the product
through video

Characteristics

-  **Warranty**
5 years
-  **Fire Resistance Rating**
M1
-  **Storage in recommended conditions**
3 years
-  **REACH / RoHS**
Compliant
-  **Widths Available**
152 cm
-  **Installation Type**
Interior
-  **Color From the Outside**
Depoli
-  **Length**
30.5 m
-  **Product Carbon Footprint (LCA)**
1.56 kgCO₂e/m²

Optical and solar properties

UV Rejection (%)	90
Visible Light Transmission (%)	50
Glue	Pressure sensitive acrylic

Application advice

Vertical situation and for a standard glazed surface

Clear Single Pane	✓
Tinted Single Pane	✓
Reflective Tinted Single Pane	✓
Clear Double Pane	✓
Tinted Double Pane	✓
Reflective Tinted Double Pane	✓
Gas-Filled Double Pane - Low E	✓
Stadip Ext. Clear Double Pane	✓
Stadip Int. Clear Double Pane	✓


✓ Yes ✗ Not recommended ! Caution

Construction

- 1 High optical quality polyester with printed design
- 2 PS adhesive, polymerizes with glass within 15 days
- 3 Protection PET release liner, disposable after installation

-  **Composition**
PET
-  **Thickness**
40 µm

Details

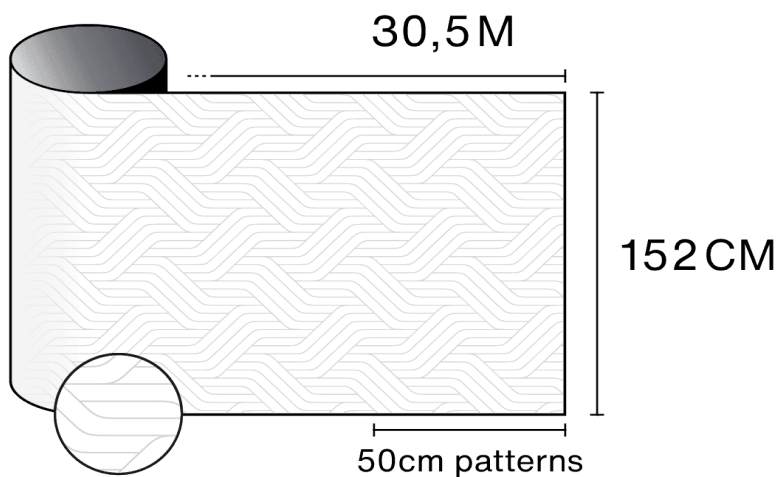

Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video