



Solar  Screen










CLEARBOARD

Design
Whiteboards - Clearboard

Description

Clearboard is a transparent dry-erase film that turns any glass surface into a writable whiteboard for standard dry-erase markers. It preserves clarity and transparency when not in use, allowing you to create multifunctional partitions in offices, meeting rooms or classrooms.

Characteristics

-  **Warranty**
10 years
-  **Fire Resistance Rating**
M1
-  **Storage in recommended conditions**
3 years
-  **REACH / RoHS**
Compliant
-  **Widths Available**
152 cm
-  **Installation Type**
Interior
-  **Color From the Outside**
Transparent
-  **Length**
30.5 m
-  **Product Carbon Footprint (LCA)**
1.56 kgCO₂e/m²

Construction

- 1 Scratch-resistant hard coating providing surface protection, durability, and ease of cleaning
- 2 High optical quality polyester
- 3 Reinforced PS adhesive to accompany the elasticity of the film in case of impact, polymerizes with glass within 30 days
- 4 Protection PET release liner, disposable after installation

-  **Composition**
PET
-  **Thickness**
80 µm

Optical and solar properties

UV Rejection (%)	95
Visible Light Transmission (%)	85
Glue	Pressure sensitive acrylic


Application advice

Vertical situation and for a standard glazed surface

Clear Single Pane	✓
Tinted Single Pane	✓
Reflective Tinted Single Pane	✓
Clear Double Pane	✓
Tinted Double Pane	✓
Reflective Tinted Double Pane	✓
Gas-Filled Double Pane - Low E	✓
Stadip Ext. Clear Double Pane	✓
Stadip Int. Clear Double Pane	✓

✓ Yes ✗ Not recommended ! Caution

Details

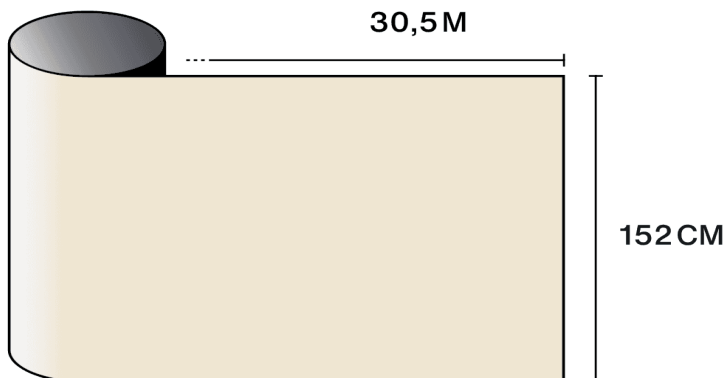

Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video